

Cain & Bultman, Inc

Stocking Program

LVT, RUBBER, VCT, SHEET VINYL & FINISHING ACCESSORIES



QUICK SHIP

2145 Dennis St.
Jacksonville FL 32204

(904) 356-4812 or (800) 874-1930
www.cainbultman.com



Pictured
Summit ACCEL
Pimlico 403LP641



Johnsonite
by  **Tarkett**

Wall Base



1-800-874-1930
www.cain-bultman.com

Colors: Dura Cove Rubber

See Profiles for specific stocking colors



DC-XX-4.5, DC-XX-4, DC-XX-6

With Toe
Height: 4", 4.5", and 6"
Thickness: .125"
Lengths: 4' and 120' coils.

Dura Cove Rubber Base See profiles for specific stocking colors.

ITEM	PROFILE	LF/CT	STOCKING COLORS
Height: 4" Length: 4' Item #: DC-XX-4	TOE	120	20 Charcoal, 28 Medium Grey, 29 Moon Rock, 40 Black, 47 Brown, 63 Burnt Umber <i>In stock until current inventory is sold - 24 Grey Haze, 32 Pebble, 49 Beige, 283 Toast, TA4 Gateway</i>
Height: 4" Length: 120' Item #: DC-XX-4R	TOE	120	20 Charcoal, 24 Grey Haze, 29 Moon Rock, 32 Pebble, 38 Pewter, 40 Black, 48 Grey, 55 Silver Grey, 63 Burnt Umber, 80 Fawn, 283 Toast, TA4 Gateway, TA6 Bedrock <i>In stock until current inventory is sold - 28 Medium Grey</i>
Height: 4.5" Length: 120' Item #: DC-XX-4.5R	TOE	120	20 Charcoal, 32 Pebble, 40 Black, 63 Burnt Umber <i>In stock until current inventory is sold - 48 Grey</i>
Height: 6" Length: 100' Item #: DC-XX-6R	TOE	100	20 Charcoal, 29 Moon Rock, 40 Black, 48 Grey, 55 Silver Grey, 63 Burnt Umber, 80 Fawn <i>In stock until current inventory is sold - 283 Toast</i>

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
960 Wall Base Adhesive	Rubber and Vinyl Wall Base	1/8 x 1/8 x 1/8 SQ	4" = 200-250 lf. 6" = 100-150 lf. 2.5" = 300-350 lf.	USE 946 PREMIUM CONTACT ADHESIVE		N/A	N/A	N/A
946 Premium Contact Adhesive	Wall Base	Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit *Coverage based on both sides		Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit *Coverage based on both sides		85%	7 lbs.	9

Vinyl Cove Base

See profiles for specific stocking colors.

ITEM	PROFILE	PC/CT	STOCKING COLORS
Height: 4" Length: 4' Item #: CB-XX-4 Gauge - .080	TOE	120	<i>In stock until current inventory is sold - 40 Black, 63 Burnt Umber</i>
Height: 4" Length: 120' Item #: CB-XX-4R Gauge - .080	TOE	120	<i>In stock until current inventory is sold - 40 Black, 48 Grey</i>
Height: 4" Length: 4' Item #: CB-XX-4 Gauge - 1/8"	TOE	120	08 Icicle, 18 Navy Blue, 20 Charcoal, 28 Medium Grey, 29 Moon Rock, 32 Pebble, 40 Black, 47 Brown, 48 Grey, 55 Silver Grey, 63 Burnt Umber, 80 Fawn
Height: 4" Length: 120' Item #: CB-XX-4R Gauge - 1/8"	TOE	120	08 Icicle, 20 Charcoal, 24 Grey Haze, 29 Moon Rock, 32 Pebble, 38 Pewter, 40 Black, 48 Grey, 55 Silver Grey, 63 Burnt Umber, 80 Fawn, 283 Toast, TA4 Gateway, TA6 Bedrock, TA8 Welsh Castle
Height: 6" Length: 100' Item #: CB-XX-6-R Gauge - 1/8"	TOE	100	20 Charcoal, 32 Pebble, 40 Black, 47 Brown, 48 Grey, 63 Burnt Umber <i>In stock until current inventory is sold - 283 Toast, 49 Beige</i>

CB-XX-4,
CB-XX-6
With Toe
Height: 4", and 6"
Thickness: .125"
Lengths: 4' and 120' coils

Colors: Vinyl Cove Base [See Profiles for specific stocking colors](#)

									
08 Icicle	18 Navy Blue	20 Charcoal	24 Grey Haze	28 Med. Grey	29 Moon Rock	32 Pebble	30 Pewter	40 Black	47 Brown
									
48 Grey	49 Beige	55 Silver Grey	63 Burnt Umber	80 Fawn	283 Toast	TA4 Gateway	TA6 Bedrock	TA8 Welsh Castle	

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
960 Wall Base Adhesive	Rubber and Vinyl Wall Base	1/8 x 1/8 x 1/8 SQ	4" = 200-250 lf. 6" = 100-150 lf. 2.5" = 300-350 lf.	USE 946 PREMIUM CONTACT ADHESIVE		N/A	N/A	N/A
946 Premium Contact Adhesive	Wall Base	Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit		Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit		85%	7 lbs.	9
		*Coverage based on both sides		*Coverage based on both sides				




1-800-874-1930

www.cain-bultman.com

Finishing Accents

Residential Wall Base

ITEM	PROFILE	PC/CT	STOCKING COLORS
4" x 48" x.080 LF / CTN 120' Item #: RWB-XX408 DIMENSION 4" X 48" Gauge - .080	STICKS	30PC	BW Bright White, CBL Carbon Black <i>In stock until current inventory is sold - CBR Cocoa Brown, DG Dove Grey, GB Gallery Beige</i>
4" X 48" X .080 Item #:WB-XX408R DIMENSION 4" X 120 Gauge - .080	COIL	1 PC	BW Bright White, CBR Cocoa Brown, CBL Carbon Black, DG Dove Grey, GB Gallery Beige



Bright White | RWB-BW



Cocoa Brown | RWB-CBR



Carbon Black | RWB-CBL



Gallery Beige | RWB-GB



Dove Grey | RWB-DG

Millwork Wall Base


Available Colors: 08 Icicle, 32 Pebble, 40 Black, 63 Burnt Umber



MW-XX-F

Reveal
Height: 4.25"
Thickness: .25"
Lengths: 8'*In stock until current
inventory is sold -
08 Icicle*

MW-XX-H

Mandalay
Height: 4.5"
Thickness: .375"
Lengths: 8'*In stock until current
inventory is sold -
32 Pebble*

08 Icicle



32 Pebble



40 Black

63 Burnt
Umber

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
960 Wall Base Adhesive	Rubber and Vinyl Wall Base, Millwork Wall Base	1/8 x 1/8 x 1/8 SQ	4" = 200-250 lf. 6" = 100-150 lf. 2.5" = 300-350 lf.	USE 946 PREMIUM CONTACT ADHESIVE		N/A	N/A	N/A
946 Premium Contact Adhesive	Wall Base	Applied with a Brush or Roller 1 kg (.95 quart) unit *24 - 36 sq. ft. per unit 6 kg (1.44 gallon) unit *144 - 215 sq. ft. per unit *Coverage based on both sides		Applied with a Brush or Roller 1 kg (.95 quart) unit *24 - 36 sq. ft. per unit 6 kg (1.44 gallon) unit *144 - 215 sq. ft. per unit *Coverage based on both sides		85%	7 lbs.	9

Luxury Vinyl Tile and Planks



1-800-874-1930


www.cain-bultman.com

Tarkett iD Latitude

Surface Treatment: Techtonic; **Total Thickness:** 0.125" (3 mm); **Wear Layer Thickness:** 20 mil with

Techtonic **Installation Method:** Roll or Glue;

Adhesive: RollSmart, 959, 975; **Pattern:** Wood, Stone, & Abstract



HEARTHSTONE
7242



CRISTALLO
7235



18" x 18"



SUNTONED TEAK
7523



VINTAGE OAK
5130



TAOS OAK
3605



AMERICAN
CHERRY 3305



CHAMOIS OAK
3606



BLANCHED PINE
5134



ACADIA PINE
5136



HICKORY
3405



6" x 48"

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
959HM Vinyl Tile and Plank Adhesive	iD Latitude	1/16 x 1/16 x1/16 Square- notch	125-150 sq. ft.	1/16x 1/32x 1/32 U-notch	250 - 300 sq. ft.	New Concrete		
						99%	10lbs	7 - 12
975 Two-Part Urethane Adhesive	iD Latitude	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	2+ Years old Concrete		
						95%	8lbs	7 - 10
RollSmart	iD Latitude	3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.		3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.				
						85%	7 lbs.	9
						95%	8 lbs.	10

NEW

Luxury Vinyl Tile and Planks



1-800-874-1930
www.cain-bultman.com

Tarkett InStudio™ 12 mil and 20 mil

Total Thickness: 12 mil - 0.079" (2.0 mm); 20 mil - 0.098" (2.5mm)
Wear Layer: 12 mil - 0.31mm; 20 mil - 0.51 mm
Installation Method: Glue-Down; Adhesive:

InStudio™ offers an array of visuals, from classic hardwood grains to sophisticated stones. All you have to do is pick your favorite. You'll find the same captivating designs with InStudio™ in both a 12 mil and 20 mil wear layer option, making it easier than ever to seamlessly meet diverse performance requirements.

Choose InStudio™ 12 for installations with light to moderate foot traffic. Choose InStudio™ 20 for higher traffic areas as it offers enhanced resistance to wear and tear.

Stocking colors available in both 12 mil and 20 mil



White Oak
Ironsides
InStudio™ 12: **IN211-12**
InStudio™ 20: **IN211-20**



White Oak
Limed
InStudio™ 12: **IN212-12**
InStudio™ 20: **IN212-20**



Classic Oak
Gold
InStudio™ 12: **IN221-12**
InStudio™ 20: **IN221-20**



Classic Oak
Brown
InStudio™ 12: **IN222-12**
InStudio™ 20: **IN222-20**



Vintage Oak
Thistle
InStudio™ 12: **IN231-12**
InStudio™ 20: **IN231-20**



Castle Oak
Newbury
InStudio™ 12: **IN241-12**
InStudio™ 20: **IN241-20**



Castle Oak
York
InStudio™ 12: **IN242-12**
InStudio™ 20: **IN242-20**



Castle Oak
Cinder
InStudio™ 12: **IN243-12**
InStudio™ 20: **IN243-20**



Cooper Bay
Copper
InStudio™ 12: **IN251-12**
InStudio™ 20: **IN251-20**



Lodge Plank
Grey Pearl
InStudio™ 12: **IN261-12**
InStudio™ 20: **IN261-20**

Colors available to order with lead times in both 12 mil and 20 mil



Toscana
Golden Isle
InStudio™ 12: **IN301-12**
InStudio™ 20: **IN301-20**



Concrete
Onyx
InStudio™ 12: **IN311-12**
InStudio™ 20: **IN311-20**




Deco
Moody Vibes
Available in 20 mil Only
InStudio™ 20: **IN321-20**




Deco
Quiet Luxury
Available in 20 mil Only
InStudio™ 20: **IN322-20**



Sahara
Dune
InStudio™ 12: **IN271-12**
InStudio™ 20: **IN271-20**



Nova
Greystone
InStudio™ 12: **IN281-12**
InStudio™ 20: **IN281-20**



Pacifica
Bianco
InStudio™ 12: **IN291-12**
InStudio™ 20: **IN291-20**

Summit LVT Collection

7 x 48 Planks

Surface Treatment: Resolute Ultra Shield Surface Coating

Installation Method: Full Spread (Above,Below and On-Grade)

Adhesive: Bondlink,Apex Pro or Tufflink

all Colors available in 6mil, 12mil and 20mil



1-800-874-1930

www.cain-bultman.com

www.norwoodhill.com



Santa Rosa W7407



Ortega W7408



San Marco W7402



Julington W7403



Waverly W7405



Southwood W7406

Summit Collection Features:

- 7 x 48 Planks all sizes
- 6 on trend wood visuals
- All colors available in 6mil, 12mil and 20mil
- Resolute Ultra Shield Surface Coating
- Floorscore Certified

Warranties:

- 6mil - 2.0mm - 15 Residential/ 5 Year Light Commercial
- 12mil - 2.0mm - 20 Residential/ 7 Year Light Commercial
- 20mil - 2.5mm - 25 Residential/ 15 Year Heavy Commercial

The Photo may not reflect the actual color.

Summit LVT Collection



1-800-874-1930
www.cain-bultman.com
www.norwoodhill.com

COMMERICAL



Julington W7403

MULTI-FAMILY



Santa Rosa W7407

RESIDENTIAL



San Marco W7402

Product Code	Description	UOM	Estimated Coverage	Tool	RH/PH
APEX PRO TAYAPEXPRO2	UNLIMITED Moisture Vapor Barrier Hard-Set Resilient Flooring Adhesive WET SET	2GAL	220 - 260 SF/GAL	1/16" X 1/32" C 1/32" U Notch	100%/14
TUFFLINK™ TAYTUFFLINK410	Firm-Set Pressure Sensitive Resilient & Carpet Flooring Adhesive SEMI-WET	4 GAL	Porous 150 - 180 sf/gal Non-porous 220 - 260 sf/gal	Porous - 1/16" x 1/16" X 1/16" Sq Notch Non-porous 1/16" x 1/32" X 1/32" u Notch	99%/12
BONDLINK TAYBONDLINK4	Hard-Set Transitional Pressure Sensitive Resilient Flooring Adhesive SEMI-WET	4 GAL	Porous and Non-porous 220 - 1/32" x 1/32" U 260 SF/GAL Notch	Porous - 1/16" x 1/16" Sq Notch Non-Porous 1/16"x1/32" x1/32" u Notch	99%/12

NEW

Summit ACCEL

Speed with Performance



1-800-874-1930

www.cain-bultman.com

www.norwoodhill.com

No Acclimation Required - *Lose the wait*

Summit ACCEL is ready to be installed right away without any wasted acclimation time.

6.5" x 48 Planks - 12 Mil

Surface Treatment: Resolute Ultra Shield Surface Coating

Installation Method: Full Spread (Above,Below and On-Grade)

Adhesive: Tufflink *Required* for Non Acclimation installation

The Photo may not reflect the actual color.



Belmont
407AP641



Churchill Downs
411AP641



Pimlico
403LP641



Hialeah
405AP641



Santa Anita
402AP641



Saratoga
406AP641

NEW

Summit ACCEL

Speed with Performance



1-800-874-1930

www.cain-bultman.com

www.norwoodhill.com

The Perfect Mix of Colors and Designs to Match Every Style



Churchill Downs 411AP641



No Acclimation Required

LOSE the wait – Summit ACCEL is ready to be installed right away without any wasted acclimation time.



Unrivaled Performance

Resolute Diamond Shield resists stains, even driveway sealer to keep floors looking newer, longer. The Rebound Core provides superior indent resistance.



Made in the USA

Ready to ship right away with no delays. Summit ACCEL floors are manufactured in the USA with global and domestic content.



100% Waterproof Planks

Summit ACCEL flooring is perfect for high moisture areas such as kitchens, bathrooms and laundry rooms.



Outperforms Thermal Pest Control

Avoid damage from bed bug heat treatment. Summit ACCEL comfortably withstands temperatures up to 160°F, outmatching the lethal temperature for bed bugs (118°F - 130°F).

Product Specifications

Construction	Luxury Vinyl Plank (LVP)
Nominal Size	6.5" x 48"
Overall Thickness	2.0 mm
Wear Layer	12 mil, Resolute Diamond Shield
Edge Detail	Square
Coverage	18 pcs. per ctn; 38.88 sq. ft. per ctn
Installation	Glue Down, No Acclimation Required
Warranty	35-Year Limited Residential / 5-Year Limited Commercial 0.45 W/cm ² or more
Flame Spread ASTM E 648	Class I
Smoke Evolution ASTM E	450 or less
662 Acoustical Performance	IIC 41, STC 52, Delta IIC 13
Temperature Performance	32°F - 160°F
Unique Visuals	30 per design
**Required Adhesives for No Acclimation	
	Bruce Tufflink or Taylor 2025

Resolute Diamond Shield Coating


Wear Layer

Design Layer

Rebound Core

Fiberglass Layer

Base

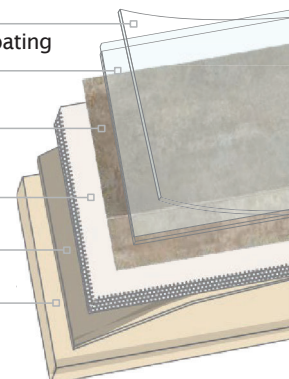

Product Code	Description	UOM	Estimated Coverage	Tool	RH
Bruce Tufflink	REQUIRED for Summit ACCEL Non Acclimation Installation	1 GAL 4 GAL	220 - 260 SF/1 GAL	1/16 x 1/32 x 1/32 U Notch	99%
Taylor 2025	Universal Latex Primer	1 GAL 4 GAL	300 - 450 SF/ GAL	3/8" short nap roller	N/A

Sheet Vinyl

iQ OPTIMA - 2mm x 6' 5" x 82' 7"

Total Thickness: 0.080" (2 mm); **Wear Layer Thickness:** 0.080" (2 mm); **Seaming:** Cold Weld/Heat Weld;

Installation Method: Glue-Down; **Adhesive:** RollSmart, 925, 975;

Key Features: Homogeneous sheet, Certified Asthma & Allergy Friendly, iQ no wax, no finish construction



KOALA BEAR
LIGHT BEIGE GREY
873
WELD RODSOLID:
1287524
WELD ROD MULTI:
1290122



BELUGA
GREY WHITE 886
WELD ROD SOLID:
1291609
WELD ROD MULTI:
1290049




SUMMER MOON
SOFT WARM WHITE
205
WELD ROD SOLID:
1287838
WELD ROD MULTI:
1290359

PERFORMA

Surface Treatment: PU Mat; **Total Thickness:** 0.080" (2.3 mm); **Wear Layer Thickness:** 25 mil (0.64 mm); **Installation Method:** Glue-Down; **Adhesive:** RollSmart, 925, 975;

Key Features: Economical heterogeneous sheet solution, Long wear with Best in Category Performance



STONEWORK
DOVER
55031
WELD ROD:
1291215

2mm x 12' x 75'

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
925 Resilient Flooring Adhesive	iQ Optima Sheet, Performa	1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.	1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.	85%	7 lbs.	9
975 Two-Part Urethane Adhesive	iQ Optima Sheet, Performa	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	90%	8 lbs.	9
RollSmart	iQ Optima Sheet, Performa	3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.		3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.		90%	8 lbs.	10
Cold Weld Liquid	iQ Optima Sheet, Performa	4.5 Ounce Tube	175 - 200 ln. ft. per tube	4.5 Ounce Tube	175 - 200 ln. ft. per tube	N/A	N/A	N/A

12" x 12" VCT II

VINYL COMPOSITION TILE


Total Thickness: 0.125" (3.18 mm); Installation Method: Glue-Down



480 PURE WHITE



509 PEWTER




522 STEEL WORKS




533 TRUE BEIGE




556 Sandstone



557 SHOOTING STAR




569 EBONY



579 BLUE DROP




580 MINERAL WHITE




593 MUSHROOM

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
100 Clear Thin Spread	VCT II	1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.	1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.	95%	10 lbs.	10
901 SpraySmart Resilient Flooring Spray Adhesive	VCT II	185 sq. ft. per 22 oz. can 1,110 sq. ft. per carton		185sq. ft. per 22 oz. can 1,110 sq. ft. per carton		90%	8 lbs.	10
975 Two-Part Urethane Adhesive	VCT II	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	1/32 x 1/16 x 1/32 U	225 - 250 sq. ft.	90%	7 lbs.	10


Rubber Tile & Treads



Black 40



Grey 48



Burnt Umber 63

RT-XX-RD.125

Size: 24" X 24" Thickness: .125" Raised Round Surface

Available Colors: 48 Grey, 40 Black

In stock until current inventory is sold - 63 Burnt Umber

Solid Rubber Tread

Without Risers

Available Colors: 40 Black, 48 Grey

In stock until current inventory is sold - 63 Burnt Umber

5' length

RNRD-XX-5RD

Raised round Surface, tread (square nose)



Solid Rubber Treads

With Riser One Piece


Available Colors: 40 Black, 48 Grey

In stock until current inventory is sold - 63 Burnt Umber

5' length

RNRDTR-XX-5RD

Raised round Surface, One Piece Tread/Riser (square nose)

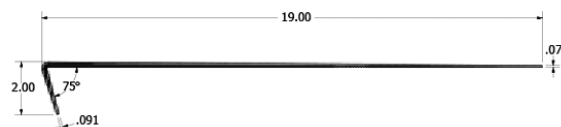

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
965 Flooring and Tread Adhesive	Rubber Floor Tiles, Rubber and Vinyl Stair Treads	1/16 x 1/16 x 1/16 SQ	125 - 150 sq. ft.	1/16 x 1/16 x 1/16 V	150 - 175 sq. ft.	90%	7 lbs.	7-9
946 Premium Contact Adhesive	Rubber and Vinyl Stair Tread	Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit *Coverage based on both sides	*24 - 36 sq. ft. per unit *144 - 215 sq. ft. per unit	Applied with a Brush or Roller 1 kg (.95 quart) unit 6 kg (1.44 gallon) unit *Coverage based on both sides	*24 - 36 sq. ft. per unit *144 - 215 sq. ft. per unit	85%	7 lbs.	9
931 Rapid Reaction Epoxy Caulking	Rubber and Vinyl Stair Treads	13.5 ounce Cartridge	1/4' = 50 lf.	13.5 ounce Cartridge	1/4' = 50 lf.	N/A	N/A	N/A

POWER TAPE SELF ADHESIVE TAPE SYSTEM INSTALLATION KITS

Type	SAP Part Number	Unit Size	Approx. Lbs Per Unit	Coverage
301 TREAD TAPE 9.5" (1 ROLL @ 9.5")	297038301	Roll (1 Per Box)	10	164 Lineal Feet/Roll
302 TREAD & RISER TAPE 9.5" (2 ROLLS @ 9.5")	297038302	Roll (2 Per Box)	19	164 Lineal Feet/Roll
310 1" TAPE (12 ROLLS @ 1")	297038310	Roll (12 Per Box)	12	164 Lineal Feet/Roll
315 1.5" TAPE (8 ROLLS @ 1.5")	297038315	Roll (8 Per Box)	12	164 Lineal Feet/Roll


Subfloor Leveler System

Available Color: 40 Black

LS40

4' pieces


Reduces 1/4" to 0." Can be cut at score line to reduce height as indicated.

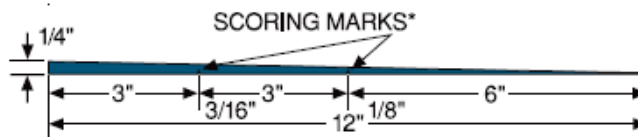

LS40D

4' pieces


Reduces 3/8" to 0." Can be cut at score line to reduce height as indicated.

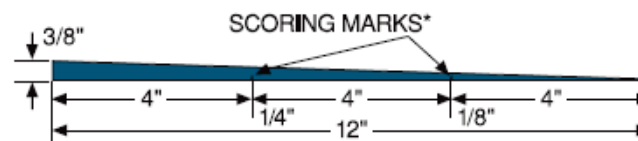

LS40E

4' pieces

Reduces 1/2" to 0." Can be cut at score line to reduce height as indicated.

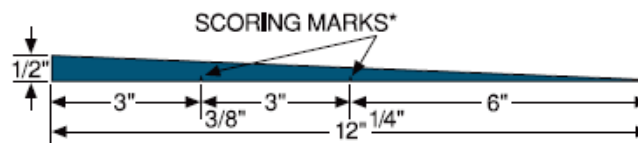

ADHESIVE	PRODUCTS	POROUS SUBSTRATES			NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel	Size	Coverage per Gal.	Trowel	Size	Coverage per Gal.	RH%	CaCl ₂
925 Resilient Flooring Adhesive	Subfloor Leveler System		1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.		1/32 x 1/16 x 1/32 U	250 - 300 sq. ft.	85%	7 lbs.
965 Flooring and Tread Adhesive	Subfloor Leveler System		1/16 1/16 x 1/16 SQ	125 - 150sq. ft.		1/16 x 1/16 x 1/16 V	150 - 175 sq. ft.	85%	7 lbs.
									pH
									9
									7-9


Finishing Accessories

Edge Guards


EG-XX-G / EG-XX-H

Available Colors:

20 Charcoal, 40 Black, 63 Burnt Umber

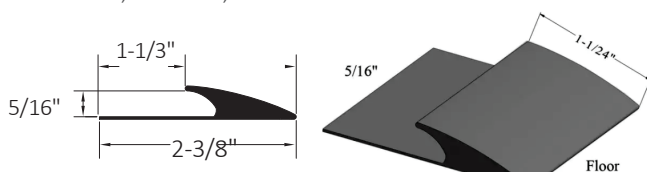

EG-XX-G
5/16" material to floor

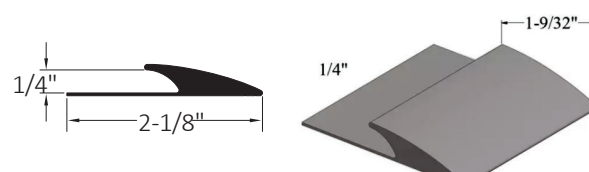

EG-XX-H
1/4" material to floor



Finishing Accessories

T Moldings **NEW**

CD-XX

Available Colors:

40 Black, 47 Brown, 63 Burnt Umber
Umber





CD-XX
1/4" and 5/16" to material of same height

Track Base

MT-00-A

Aluminum Track-Pinless

for glue-down Installation
Length 12ft





Reducer

SSR-XX-B

Available Colors:

40 Black

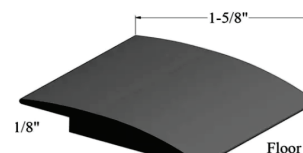


SSR-XX-B
35' Roll
1/16" through 1/8" material to floor

Adaptors

CTA-XX-A

Available Colors:

20 Charcoal, 40 Black, 63 Burnt Umber





CTA-XX-A
1/4" to 1/8" material

Wheeled Traffic Transitions

CTA-XX-J

Available Color:



40 Black

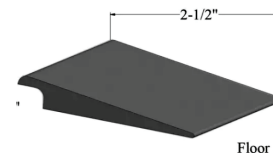

CTA-XX-J
1/4" material to subfloor

Cove Filler


CFS-00A




Cove Cap

SCC-XX-A

Available Colors: 49 Beige, 24 Gray Haze,
09 Clay




SCC-XX-A
For 1/8" material 49 Beige



Self Stick Tub Moulding

TM50

1-1/2" height (self-stick) Luster finish
cove for bathtub, counter and
shelves. Available in 50 White only.



Finishing Accessories



1-800-874-1930
www.cain-bultman.com

Metal Edge **NEW**

ME001 / MET02

Available Colors:

82 Black Pearl, 178 Ironstone, 179 Steel




82 Black Pearl




178 Ironstone



179 Steel

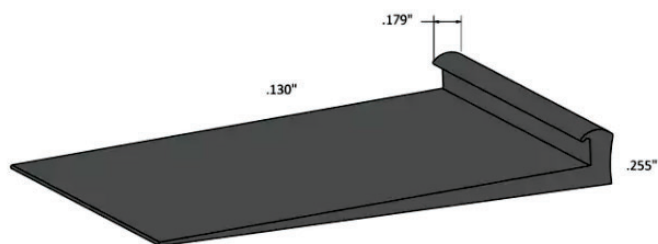

ME-001 LVT to Carpet Transition

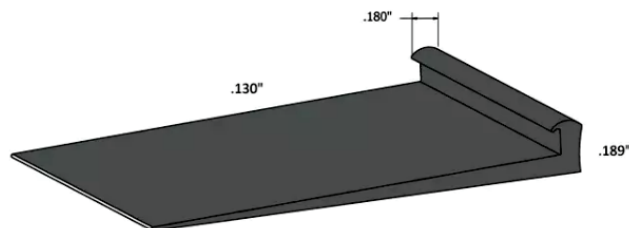

MET-02 LVT to Carpet Transition

ADHESIVE	PRODUCTS	POROUS SUBSTRATES		NON-POROUS SUBSTRATES		MOISTURE AND pH LIMITS		
		Trowel Size	Coverage per Gal.	Trowel Size	Coverage per Gal.	RH%	CaCl ₂	pH
RollSmart	Metal Edge	3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.		3/8" Nap Paint Roller (used with a paint tray) 350 - 400 sq. ft.		90%	8 lbs.	10
946 Premium Contact Adhesive	Transitions / Finishing Accessories	Applied with a Brush or Roller 1 kg (.95 quart) unit *24 - 36 sq. ft. per unit 6 kg (1.44 gallon) unit *144 - 215 sq. ft. per unit *Coverage based on both sides		Applied with a Brush or Roller 1 kg (.95 quart) unit *24 - 36 sq. ft. per unit 6 kg (1.44 gallon) unit *144 - 215 sq. ft. per unit *Coverage based on both sides		85%	7 lbs.	9
310 1" TAPE (12 ROLLS @ 1")	Wheeled Traffic Transitions							
315 1 5" TAPE (8 ROLLS @ 1.5")	Wheeled Traffic Transitions					80%	5 lbs.	9



Cain & Bultman, Inc
2145 Dennis St
Jacksonville, FL 32204
(904) 356-4812 or (800) 874-1930
www.cainbultman.com

04/2025